

# LZCG930-10

### Cheap Low Voltage Cast Resin Ring Core Current Transformer

The Model LZCG930-10 CT is a ring type resin casting current transformer. Some clients also called it as TTCC. This current transformer can be used both for measurement and microcomputer protection of electrical equipment in 11KV and 35KV AC power system, It is widely used in not only compact fully insulated ring network switchgears such as ABB-Safe Ring/Safe Plus, Unstitch, Schneider RM6, SM6, Siemens 8DJ10/8DH10, Simosec, FBX, Fluokit, Omar Garbo GA, GAE; SEL TPS(Q); VEI Unifluorc; Eaton SVS/12 ring network, but also cable distribution boxes because of its small size, light weight, operable and convenient installation. It is very convenient that the transformer can be directly installed at the inlet and outlet cables.

New magnetic material is taken to be the core of the current transformer, which has high magnetic permeability, low saturation magnetization and good stability. Therefore, the measuring accuracy is higher and the instrument security factor is lower. Since the high quality silicon processed by advanced technology is taken to be the core of the protection windings, which assured the accuracy limit factor is higher.

We used imported silicon material and using our mature advanced producing technology we make sure our transformer has very goog linear and more than 20 years using life in order to be qualified with all the jobs. The ring core and secondary windings are vacuum poured by high quality polyurethane insulated resin , which has the characteristic of moisture proof, stable performance and dispensing with maintenance.

All of our ring core current transformers are strictly comply IEC60044-1, IEC 61869-2, NTC 2205, GB1208-2006, GB20840.2-2013, ANSI/IEEE C57.13.

#### **Features**

- 1. Size:φ60xφ155x60;
- 2. Support Dual Ratio;
- 3. Polyurethane resin casting;
- 4. Using life more than 20 years;
- 5. Holding wire diameter: φ60mm;
- 6. Measurement range 0-1000A AC;
- 7. High precision 0.2s,0.2%, 0.5s,0.5%;
- 8. Easily installation, with mounting bracket;
- 9. Protection class 5P20, 5P10, 10P15, 10P10, 10P5;
- 10. The protection level CT can accept customized design;
- 11. High quality polyurethane resin cast current transformer;
- 12. Secondary windings are vacuum poured by insulated resin;
- 13. 100/5A, 200/5A, 300/5A, 400/5A, 500/5A, 600/5A, 750/5A, 800/5A, 1000/5A;
- 14. IEC60044-1, IEC61869-2, , NTC 2205, GB1208-2006, GB20840.2, ANSI/IEEE C57.13;






### **Appliations**


- 1. Meter tester;
- 3. Energy meter;
- 5. Air switch cabinet;
- 7. Power Quality meter;
- 9. Measuring instrument;
- 11. Low voltage metering system;


- 2. Power Meter;
- 4. MV switchgears;
- 6. Distribution boxes;
- 8. Ring network cabinet;
- 10. Current load monitoring;
- 12. Distribution Power transformer monitor system;


### **Model Meaning**

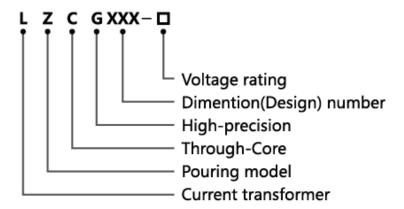

### **Wiring Diagrams**







Single winding

Secondary winding with tap


Double winding

P1, P2 is primary polarity terminal, S1, S2 is secondary polarity terminal.

P2, S2 is homonymous terminals (subtractive polarity).



# **Outline Drawing**

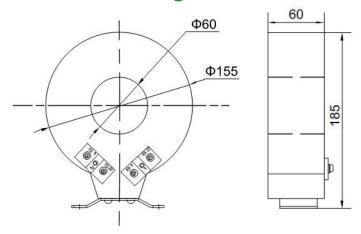

### **Parameters**

| Technical parameters                      |   |  |  |  |
|---|---|--|--|--|
| Standards                                 | IEC60044-1; IEC 61869-2; NTC 2205; ANSI/IEEE C57.13; GB1206-2006;   |  |  |  |
| Accuracy Class                            | 0.2S, 0.2, 0.5S, 0.5 (IEC61869-2 standard)                          |  |  |  |
| Rated primary current                     | 30-1000A  |  |  |  |
| Rated load                                | ≤30VA   |  |  |  |
| Rated frequency                           | 50Hz or 60Hz  |  |  |  |
| Rated secondary current                   | 5A or 1A  |  |  |  |
| Ratio                                     | 100/5A, 150/5A, 200/5A, 300/5A, 400/5A, 500/5A1000/5A               |  |  |  |
| Rated short-time thermal current          | 40kA, 1S  |  |  |  |
| Rated continuous thermal current          | 120%l1n   |  |  |  |
| Secondary winding power-frequency voltage | 3kV, 1min   |  |  |  |
| Instrument security factor                | FS ≤10  |  |  |  |
| Insulation Class                          | A   |  |  |  |
| Material                                  | polyurethane +Silicon steel sheets+Enameled wire+ABS                |  |  |  |
| Mechanical parameters                     |   |  |  |  |
| Dimensions (W×D×H) (mm)                   | φ60xφ155x60   |  |  |  |
| Jaw cable diameter(mm)                    | 60  |  |  |  |
| Weight (kg)                               | 3.6   |  |  |  |
| Operating conditions                      |   |  |  |  |
| Operating temperature                     | -40°C to +70°C  |  |  |  |
| Daily average temp                        | <+40°C  |  |  |  |
| Storage temperature                       | -40°C to +70°C  |  |  |  |
| Altitude                                  | <3500 meters  |  |  |  |
| Condition                                 | No existence of severely begrimed, erosive and                      |  |  |  |
|   | radioactive gas in the air. Permission of long-term operation under |  |  |  |
|   | rated current.  |  |  |  |





## **Technical Data**

| Туре                        |   | LZCG93            | 30-10             |       |  |  |  |
|-----------------------------|---|-------------------|-------------------|-------|--|--|--|
| Purpose                     | Measuring current transformer               |                   |                   |       |  |  |  |
| Rated primary current (AMP) | Accuracy class and rated load(VA)           |                   |                   |       |  |  |  |
|                             | 0.25  | 0.2               | 0.5S              | 0.5   |  |  |  |
| 50                          | 2.5   | 2.5               | 5                 | 5     |  |  |  |
| 100                         | 2.5   | 5                 | 7.5               | 7.5   |  |  |  |
| 150                         | 5   | 7.5               | 10                | 10    |  |  |  |
| 200                         | 7.5   | 10                | 15                | 15    |  |  |  |
| 300                         | 10  | 15                | 15                | 15    |  |  |  |
| 400                         | 15  | 15                | 15                | 15    |  |  |  |
| 500                         | 20  | 20                | 20                | 20    |  |  |  |
| 600                         | 20  | 20                | 20                | 20    |  |  |  |
| 750                         | 20  | 20                | 20                | 20    |  |  |  |
| 800                         | 20  | 20                | 20                | 20    |  |  |  |
| 1000                        | 20  | 20                | 20                | 20    |  |  |  |
| Purpose                     | Protection current transformer              |                   |                   |       |  |  |  |
| Rated primary current       | Accuracy class and rated load(VA)           |                   |                   |       |  |  |  |
| (AMP)                       | 5P20  | 5P10              | 10P15             | 10P10 |  |  |  |
| 30                          | 1   | 1                 | 1                 | 1     |  |  |  |
| 40                          | 1   | 1                 | 1                 | 1     |  |  |  |
| 50                          | 2   | 2                 | 2                 | 2     |  |  |  |
| 75                          | 2   | 2                 | 2                 | 2     |  |  |  |
| 100                         | 2.5   | 2.5               | 2.5               | 2.5   |  |  |  |
| 150                         | 2.5   | 2.5               | 2.5               | 2.5   |  |  |  |
| 200                         | 5   | 5                 | 5                 | 5     |  |  |  |
| 300                         | 5   | 5                 | 5                 | 5     |  |  |  |
| 400                         | 7.5   | 7.5               | 7.5               | 7.5   |  |  |  |
| 500                         | 7.5   | 10                | 10                | 10    |  |  |  |
| 600                         | 7.5   | 10                | 15                | 15    |  |  |  |
| Purpose                     |   | Double winding cu | rrent transformer |       |  |  |  |
| Rated primary current       | Composite accuracy class and rated load(VA) |                   |                   |       |  |  |  |
| (AMP)                       | 0.2S  | 0.5               | 10P15             | 10P10 |  |  |  |
| 100                         | 2.5   | 2.5               | 1                 | 1     |  |  |  |
| 150                         | 2.5   | 3.75              | 2                 | 2.5   |  |  |  |
| 200                         | 5   | 7.5               | 2.5               | 3.75  |  |  |  |
| 300                         | 7.5   | 10                | 2.5               | 5     |  |  |  |
| 400                         | 10  | 12.5              | 3.75              | 5     |  |  |  |
| 500                         | 15  | 15                | 3.75              | 5     |  |  |  |
|                             |   |                   |                   |       |  |  |  |





### **Selection Guide**

| Model       | Primary rated current | Rated load | Aperture (mm)  | Description<br>(mm) | Weight (kg) |
|-------------|-----------------------|------------|----------------|---------------------|-------------|
| LZCK310-10  | 300-1000A             | ≤10VA      | ф50            | ф50 х ф110 х 32     | 1           |
| LZCK322-10  | 30-1000A              | ≤10VA      | ф50            | ф50 х ф110 х 52     | 1.6         |
| LZCK350-10  | 30-1000A              | ≤25VA      | ф50            | ф50 х ф110 х 105    | 3.1         |
| LZCK720-10  | 30-1000A              | ≤25VA      | ф80            | ф80 х ф110 х 50     | 2.1         |
| LZCK2500-10 | 30-3000A              | ≪30VA      | ф120, 140, 160 | ф120 х ф185 х 100   | 7           |
| LZCG530-10  | 30-1000A              | ≤20VA      | ф45            | ф45 х ф120 х 65     | 2.1         |
| LZCG930-10  | 30-1500A              | ≤25VA      | ф60            | ф60 х ф155 х 60     | 3.6         |
| LZCT722-10  | 30-1500A              | ≤10VA      | ф82            | ф82 х ф130 х 55     | 2.3         |
| LZCG2500-10 | 30-3000A              | ≪30VA      | ф120, 140, 160 | ф120 х ф185 х 100   | 7           |

# **Ordering Information**

Be sure to the type, current ratio, accuracy class, rated load and use of the products when you plan to make a order. Special specifications could be customized. All kinds of different specifications and parameters current transformers can be made according to your needs.